

ingenico

OPEN/2500

Sleek, powerful and scalable contactless module to fit any transport projects



- Designed for Open Payment by meeting transport & payment requirements
- Suitable for gates and validators where the contactless area must be more visible from customers
- Complies with transport & payment standards thanks to a dedicated compliant contactless reader
- Enable new use cases such as contactless tickets, mobiles or IoT and closed-loop cards



The best of transport and payment worlds to meet all your Open Payment requirements.

All contactless payment methods supported

- Close loop cards (Mifare®, Desfire®...) and contactless tickets
- EMV (Visa, Mastercard, Amex) including transit versions

Easy mechanical integration and maintenance:

- A flush design to fit easily in any gates (metro, railways) and a hitting area with 6 rows of 4 LEDs
- Compact form factor


Highest level of security with PCI PTS certification

Transportation version

- Compliant with automotive and railways standards
- Additional removable battery to preserve internal battery during all reader lifetime

Consumer version

- Fit for toll, access control, EV charging
- Power Over Ethernet for an easy integration

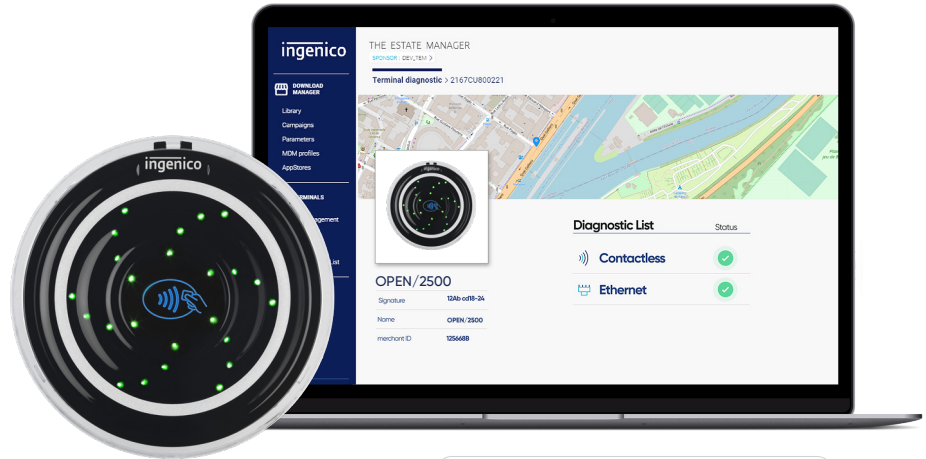

Supported by Ingenic's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

Specifications

Processor/OS	• Cortex A5 - Telium TETRA	✓	IP	• IP 65	✓
Memory	• 512 MB Flash, 512 MB RAM • MicroSD up to 32GB	✓ ✓	IK	• IK 10	✓
Contactless readers	• EMV Contactless L1 3.1 certified / Support ISO 14443 • ISO 18 092 (reader mode)	✓ ✓	Terminal size	• 94 (W) x 94 (H) x 38(D) mm (3.7x3.7x1.5")	✓
SAM	• 4xSAM ID-000 ISO 7816 (High Speed protocol)	✓	Weight	• 168 g (5.9oz)	✓
User interface	• RVB backlit landing zone • 4 RVB LEDs	✓ ✓	Operation conditions	• Relative humidity: 95% non-condensing at 40°C • External temperature range: -20°C to +70°C (-4°F to 158°F) for consumer product • External temperature range: -20°C to +55°C (-4°F to 131°F) for transportation (automotive, railways) product	✓ ✓ ✓
Audio	• Buzzer Monotone • Polyphonic sound with external loudspeakers	✓ ✓	Storage conditions	• 95% non-condensing at 55°C • External temperature range: -20°C to +70°C (-4°F to 158°F)	✓ ✓
Power Supply	• 12V - 24V DC • Power over ethernet up to 48V DC (consumer version only)	Option Option	Specific to transportation	• Additional removable battery to avoid any internal battery change during the product's lifetime	✓
Terminal Connectivity	• Ethernet 10/100, 1 x RJ45 LAN port	✓	Specific to consumer version	• LAN with Power over Ethernet (PoE) - up to 48V DC	✓
Terminal Connections	• 1 x USB Slave • 1 x USB Host • 2 x RS232 • I/O isolated ports (2 x inputs + 2 x outputs) • 1 x 2 PIN connector for external loudspeaker	✓ ✓ ✓ ✓ ✓	Accessory	• 6 points to 2 points connector adapter (for 12V PSU)	✓
Security	• PCI PTS 6 certified	✓			

